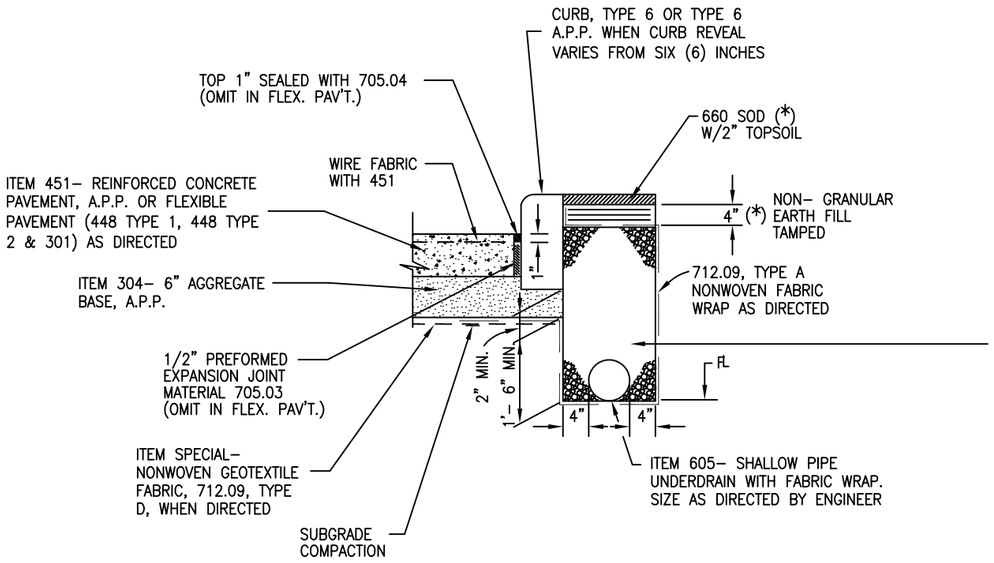

CURB, TYPE 6 AND SHALLOW PIPE UNDERDRAIN WITH FABRIC WRAP

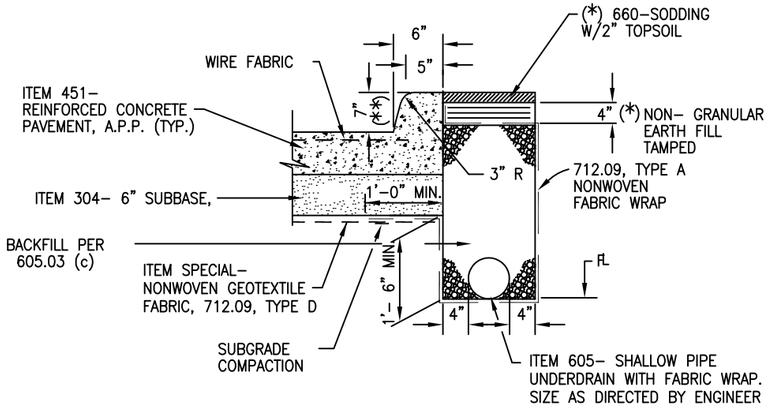

CURB, TYPE 2–A, A.P.P. (**) AND SHALLOW PIPE UNDERDRAIN WITH FABRIC WRAP

NOTES:

WHEN ITEM 605 CALLS FOR 706.08 CONDUIT, THE CONDUIT SHALL BE PERFORATED BELL AND SPIGOT VITRIFIED CLAY PIPE WITH PERFORATIONS IN ACCOR– DANCE WITH A.A.S.H.T.O. M–65, WITH THREE (3) LUGS PROVIDED IN THE BELL END TO CENTER AND ALIGN THE PIPE AND PROVIDE A THREE– EIGHTH (3/8) INCH GAP BETWEEN PIPE LENGTHS. PERFORATIONS ARE PLACED DOWN.

(*) WHEN USING 659–SEEDING AND MULCHING IN LIEU OF SOD WITH TOPSOIL, THE UNDERDRAIN TRENCH SHALL SIMPLY BE TOPPED WITH SIX (6) INCHES OF NON– GRANULAR EARTH FILL TAMPED.

(**) SPECIFY CURB, TYPE 2–A WHEN UTILIZING A SIX (6) INCH REVEAL PER WESTLAKE STANDARD CONSTRUCTION DRAWING SHEET 13.

SPECIFY CURB, TYPE 2–A, AS PER PLAN WHEN REVEAL VARIES FROM SIX (6) INCHES.

SPECIFY CURB, TYPE 2–B WHEN UTILIZING WEARING COURSE AND SIX (6) INCH REVEAL PER WESTLAKE STANDARD CONSRUCTION SHEET 13.

SPECIFY CURB TYPE 2–B, AS PER PLAN WHEN REVEAL VARIES FROM SIX (6) INCHES.

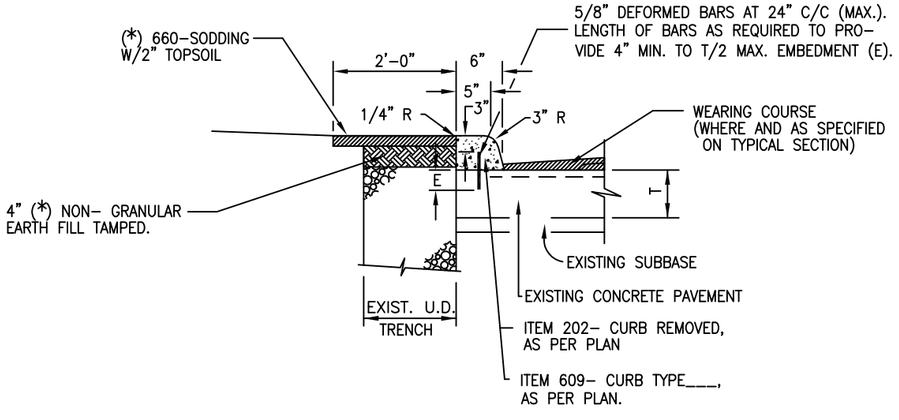

INTEGRAL CONCRETE CURB REPLACEMENT DETAIL METHOD "A"

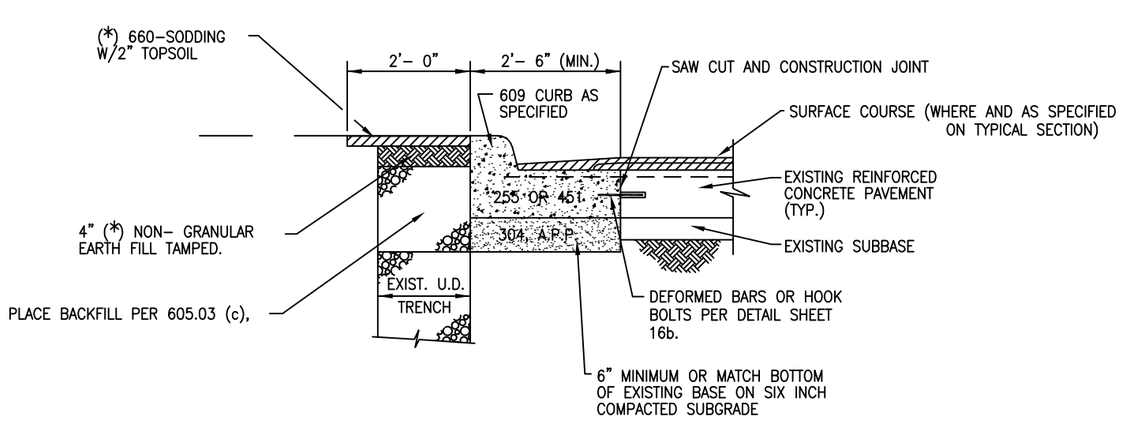

INTEGRAL CONCRETE CURB REPLACEMENT DETAIL METHOD "B"

(SEE DWG. ____)

REV No.	DATE	BY	DESCRIPTION
1	2/25/04	DAH	General Revisions – Re–Issued

CITY OF WESTLAKE, OHIO
DEPARTMENT OF ENGINEERING

CONCRETE CURB & UNDERDRAIN DETAILS

SCALE: AS NOTED
DATE: DRWN BY:

14